

PCT/IB04/2255



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

REC'D 26 JUL 2004

WIPO

PCT

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-
gen stimmen mit der
ursprünglich eingereichten
Fassung der auf dem näch-
sten Blatt bezeichneten
europäischen Patentanmel-
dung überein.

The attached documents
are exact copies of the
European patent application
described on the following
page, as originally filed.

Les documents fixés à
cette attestation sont
conformes à la version
initialement déposée de
la demande de brevet
européen spécifiée à la
page suivante.

BEST AVAILABLE COPY

Patentanmeldung Nr. Patent application No. Demande de brevet n°

03291725.4

PRIORITY DOCUMENT
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH
RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk

Anmeldung Nr:
Application no.: 03291725.4
Demande no:

Anmeldetag:
Date of filing: 11.07.03
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

SCHLUMBERGER Systèmes
BP 620, 50 Avenue Jean Jaurès
92120 Montrouge
FRANCE

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.
If no title is shown please refer to the description.
Si aucun titre n'est indiqué se référer à la description.)

Device delivering a service using an associated portable object, and including
relay means for allowing activation of an application of the portable object by a
second device

In Anspruch genommene Priorität(en) / Priority(ies) claimed /Priorité(s)
revendiquée(s)
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/
Classification internationale des brevets:

G07F/

Am Anmeldetag benannte Vertragsstaaten/Contracting states designated at date of
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LU MC NL
PT RO SE SI SK TR LI

Device delivering a service using an associated portable object, and including relay means for allowing activation of an application of the portable object by a second device

5 **1 Technical application field**

The invention relates to a first device for delivering a service using an application lodged in a portable object, comprising a portable object reader for receiving said portable object, the portable object incorporating at least one application and the first device including resources for activating said
10 application. The general problem to be solved is to allow, beside usual activation of an application of the portable object by the resident resources of the first device, activation of an application of the portable object by a second device, independently of said resident resources.

15 This feature offers several advantages, in particular :

- in case the resources of the first device are regarded as too limited for certain management operations of the application (for example, the keyboard and display are small), activation by the second device may offer extended resources ;
- 20 -for executing certain operations of the application, it may be desired or even required that only said second device will manage said operations. For example, it may be decided that some secure operations such as a funds transfer with the portable object will be only possible if executed by said second device.

The wording "portable object" includes any object able to lodge an application, such as a memory card or a microcontroller card (smart card).

The present invention will be explained based on the following drawings :

5 Figure 1 illustrates the known USB bus topology ;

Figure 2 illustrates a smart card based WEB server application ;

Figure 3 illustrates the invention, the first device being constituted by a HUB cellular handset;

10 Figure 4 illustrates the invention applied to a secure off-line banking accounts browsing architecture.

2 State of the art

Since a preferred embodiment of the invention uses the USB technology, a short reminder of the latter is now made.

15 2.1 Introduction to the USB technology

The USB technology is defined by a standard described in the "*Universal Serial Bus specification*". Details can be found in this document accessible on Internet site www.usb.org. The USB physical interconnect is a tiered star made of three types of devices :

- 20 1. The USB root that is hold by a host device such as a PC (Personal Computer).
2. The USB HUB (interconnect). There is at least one HUB in a USB that is the root HUB. There may be up to five levels of HUB on the same bus.
- 25 3. The USB functions that are always connected to a HUB. It may be a scanner, a printer, a joystick...

Figure 1 describes the USB topology. Objects named "Func" are the USB functions (printer, scanner...):

2.2 Compound device

- 5 A compound device is a unique physical device that combines one or more functions with a HUB in a single package. There might be a single chip, or a more complicated electronic device combining several electronic components.

2.3 Virtual device and real device

- 10 In the USB standard, a real device (i.e. a scanner, a printer...) is always coupled with a virtual device that is the device driver allowing the computer application to access to the real device functions.

In case of a compound device, it is associated with a least 2 virtual devices (1 for the HUB and 1 per function).

2.4 Example of an application using a WEB server embedded in a smart card

15

In figure 2, secure areas are surrounded with a dashed rectangle. This ensures the user data are held in secure places.

It works as follows :

- 20 • Regularly, and preferably when the network is underused, the smart card and the bank server synchronize the user data. The bank transfers both the data to display in an XML file and the pages format in an HTML file. Locally, the smart card WEB server is able to prepare the HTML pages including the data in order to answer to the handset browser queries with a ready to use HTML page.

- When the user wants to browse its account, it can require the handset browser to query the smart card WEB server instead of accessing to the bank server.

2.5 The improvement proposed

- 5 The application presented chapter 2.4 is interesting, but the user interface is limited by the handset keyboard and display.

The goal of the present invention in this context is to allow the user to browse the smart card content from its PC, without having to remove the card from the handset.

- 10 One should not think the invention is limited to the WEB server. It also applies to all the data and applications embedded in the smart card. Furthermore, the invention is applicable, not only to smart cards, but also to any combination where a removable device is coupled to another device that may be in relation with a 3rd device itself compatible with the removable device mentioned here
15 above.

3 The invention

- For achieving this goal, the invention concerns a first device for delivering a service using an application lodged in a portable object, comprising a portable
20 object reader for receiving said portable object, the portable object incorporating at least one application and the first device including resources for activating said application, characterized in that it includes relay means arranged for performing a communication between said portable object reader and a second device external to said first device and connected thereto so that the second
25 device activates at least one application of the portable object independently of said resources.

The invention described herein may be used to have access to any application provided by a mobile communication handset embedding a smart card (e.g. GSM, WCDMA...) but not exclusively.

- 5 In figure 3, a browser in the PC queries a WEB server present in a USB SIM card through a USB HUB present in the cellular handset.

Beyond the cellular handset, the invention is applicable to any portable device subject to behave as an intermediate between another portable device it embeds - such as a smart card - and another equipment that has access to the
10 embedded device exactly as if the connection was realized without any intermediate.

More particularly, the invention comprises the following features :

1. Implementing a relaying function on a device A in which the smart card is
15 inserted.

This function may be realized using different means, depending on the communication capabilities of the communicating object. For instance, one could use the Internet Protocol, the USB or mixing both on the device A. In figure 3, the relaying function is constituted by the USB HUB in the
20 cellular handset.

2. This relaying function is used to establish a link between the smart card and a device B (here, a PC). In the example of figure 3, the expected advantage is using some improved display and entry peripheral comparing with the ones existing on the device A. According to the USB
25 technology, the smart card includes at least one USB device. Here, it includes several devices, so that it also includes a corresponding USB HUB for giving access to any USB device. Any application of the card,

shown on figure 3, may be reached by device B through USB HUB of the cellular handset and USB HUB of the card.

5 Whatever the technology concerned, device B has access to the card through the relaying function and a card reader usually provided in the cellular handset. Typically but not exclusively, signals emanating from device B are managed by the relaying function, bypassing the known resources of the cellular handset (at least mobile communication application, keyboard and display). Then, the relaying function sends corresponding signals to the card, through the card reader. The same path is used for signals emanating from the card and destined to device B, that is through the card reader then through the relaying function.

- 10 3. The link between the smart card and the device B is established in a such a way that the device B may have no idea that the smart card is in reality inserted in a device A that may natively be conceived as a peripheral for the device B.
- 15 4. The type of link or protocol used between the smart card and the device A, the device A and the device B, or the smart card and the device B has no importance, assuming there is no technical impossibility (e.g. speed concerns). The protocols and/or the physical means used can be different.
- 20 5. Defining a link including the device A, the device B and the smart card is the minimum, but several other devices might be inserted in any place of the link.

Some advantages of the invention :

- 25 1. Having access to the smart card from the device B makes the user more comfortable to manage the data in the card (whatever the data are).

2. If the device B is equipped with an Internet connection (for example), the applications embedded in the smart card could take advantage of this connection to upload and /or download data.
3. Simplifying the access to the card in such a way may help to use the secure area that is the card.

4 Implementation example

4.1 Introduction

This example consists on securely browsing banking accounts from a cellular handset at any time (i.e. even if the network is not available), and being also able browsing the same data from a PC browser with a better user interface (taking advantages of the PC display, keyboard, mouse and more).

It uses the following :

- An advanced cellular handset connected to the Internet, compatible with USB smart cards, and embedding the relaying function by including a USB HUB.
- A USB SIM card embedding a WEB server (might be programmed in Java for example).
- A bank WEB server to exchange data with WEB server in the SIM, or to browse user accounts using a standard WEB browser (e.g. Internet Explorer or Netscape-registered trademarks).
- A PC embedding a USB host (and root HUB) as shown in Tier 1 of figure 1, a USB plug, etc.

4.2 Components characteristics

4.2.1 Cellular handset characteristics

The cellular handset shall be immediately connected to the Internet when, being compatible with GPRS or UMTS standards, it recognizes the network. It shall
5 have an IP address that may change at each startup (a fixed IP address is not mandatory). Of course, depending on the network status, the IP link may sometimes be broken.

A standard WEB browser is available on the cellular handset. It may be alternatively connected to a server over the wireless connection, or to the server
10 in the SIM (see §4.2.2). From the browser standpoint there are no differences. Every server involved has an IP address.

The handset and the card are connected using a USB. The SIM, UMTS, GRPS or any other applications are viewed as USB devices.

The handset is directly connected to an external USB host such as a PC. It
15 becomes a USB HUB (see figure 3).

From the SIM standpoint, the cellular handset is a USB HUB that is connected to a host.

The handset cannot access the GSM, GPRS and/or some other USB devices as it is just behaving as a USB HUB (this is for the example, but technical solutions
20 can be implemented to allow the handset continuing having access to the application that may not interest the USB root to which it is connected).

4.2.2 SIM card characteristics

In this example, the SIM card embeds at least the following:

- The SIM standards requirements to allow the handset to have access to
25 the cellular network (i.e. the GSM, the GPRS and/or equivalent applications).

- A WEB server able replying to incoming queries and to exchange files with a distant server (using FTP or HTTP protocol for instance).
- An XML parser.
- Cryptographic means to manage keys, encrypt, decrypt, sign...
- 5 • Preferably, a JavaCard virtual machine.
- All complementary software and drivers to make all elements listed here above to interact.

The handset has access to the card through a USB. It detects a USB HUB followed by several USB devices.

- 10 The card embeds a USB HUB and a WEB server. The WEB server virtual device (i.e. device driver) implemented on the handset makes it accessible using IP (Internet Protocol). The card becomes an Internet node. Any equipment able to have access to this USB, and having the correct device driver, can have access to the card WEB server like any other WEB server, thus using an IP
- 15 address.

The IP frames are encapsulated in USB protocol, and the device drivers, both on the handset and on the card, provide the interface masking the real data transport mean.

- 20 When the USB host detects that the card embeds a USB device that is a WEB server, it performs the required operation to allocate it an IP address.

4.2.3 WEB server characteristics

The (distant) WEB server is a standard server embedding means to exchange files with the SIM card WEB server.

4.2.4 Complementary characteristics

- 25 The bank server and the card server should share some cryptographic keys in order to exchange files and / or queries securely (in order to protect the user banking information). The protocol used here is not important as long as the

security level is strong enough. There are many standard solutions existing to solve this concern. One of them is using the PKI (Public key Infrastructure) architecture.

4.3 Secure off-line banking accounts browsing

5 Figure 4 shows the architecture of the example, using the components described in paragraph 4.2.

- The handset behavior is the one of a device embedding a USB HUB device.
- 10 • The handset is connected to a USB host. This host shows the USB HUB in the handset, followed by the one in the smart card, followed by the devices in the smart card, particularly the WEB server.
- The host has the required virtual devices (i.e. the device driver) at its disposal. It is these virtual devices that encapsulate the IP frame to make it compatible with the USB.
- 15 The WEB server device in the smart card is consequently accessible from the host (i.e. the PC) like any other IP node.
- When the user wants to browse its banking information, it uses the browser of its PC (e.g. Netscape or Internet Explorer). He can have access to its banking information either by accessing the Internet, or
- 20 by browsing its data locally by querying the WEB browser in the smart card.
- When the PC (USB host) is connected to the Internet, the smart card WEB server can take advantage of this situation to synchronize its databases with the bank ones.

25 The link between the handset and the PC does not need to be a USB one. The encapsulation process allows using any type of link such as BlueTooth, IP or

any other compatible link. The relaying function in the cellular handset will be, in each particular case, adapted to the type of link chosen.

4.4 Alternate solutions

The entire example described here above is based on the USB protocol. Of course, many other protocols can also match the requirement. One could imagine a smart card and a handset natively embedding the IP. Then, the switching operation from the USB root to the USB HUB function is not anymore required as the smart card and the handset both become an Internet node.

When connected to a PC, all the three participants are able to have access to each other with no other restrictions than the one defined by the IP specifications.

CLAIM

A first device for delivering a service using an application lodged in a portable object, comprising a portable object reader for receiving said portable object, the
5 portable object incorporating at least one application and the first device including resources for activating said application, characterized in that it includes relay means arranged for performing a communication between said portable object reader and a second device external to said first device and connected thereto so that the second device activates at least one application of
10 the portable object independently of said resources.

ABSTRACT

Device delivering a service using an associated portable object, and including relay means for allowing activation of an application of the portable object by a second device

5

The invention concerns a first device for delivering a service using an application lodged in a portable object, comprising a portable object reader for receiving said portable object, the portable object incorporating at least one application and the first device including resources for activating said application, characterized in that it includes relay means arranged for performing a communication between said portable object reader and a second device external to said first device and connected thereto so that the second device activates at least one application of the portable object independently of said resources.

15

Fig. 3

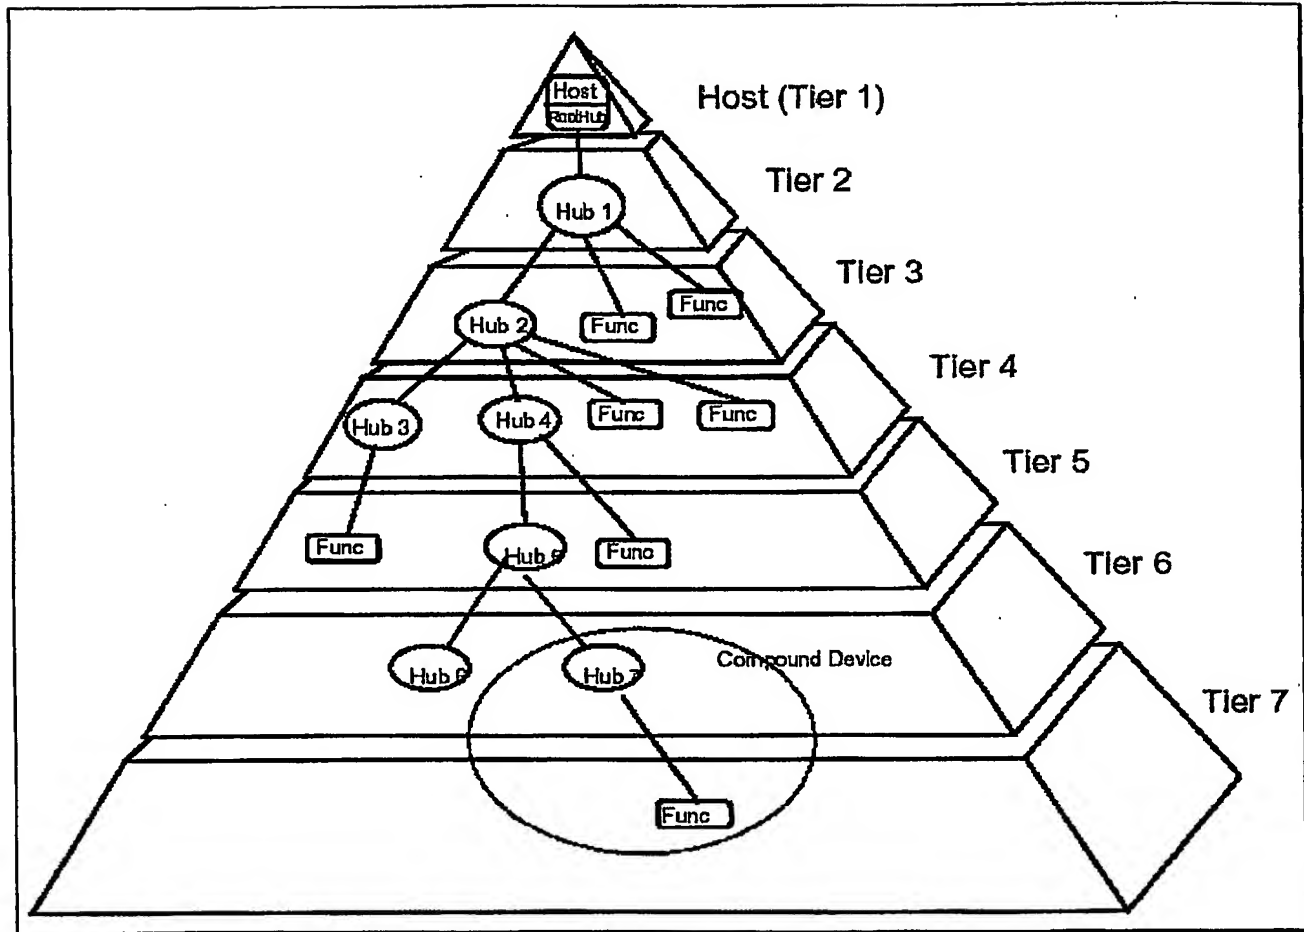


Fig. 1 (Prior art)

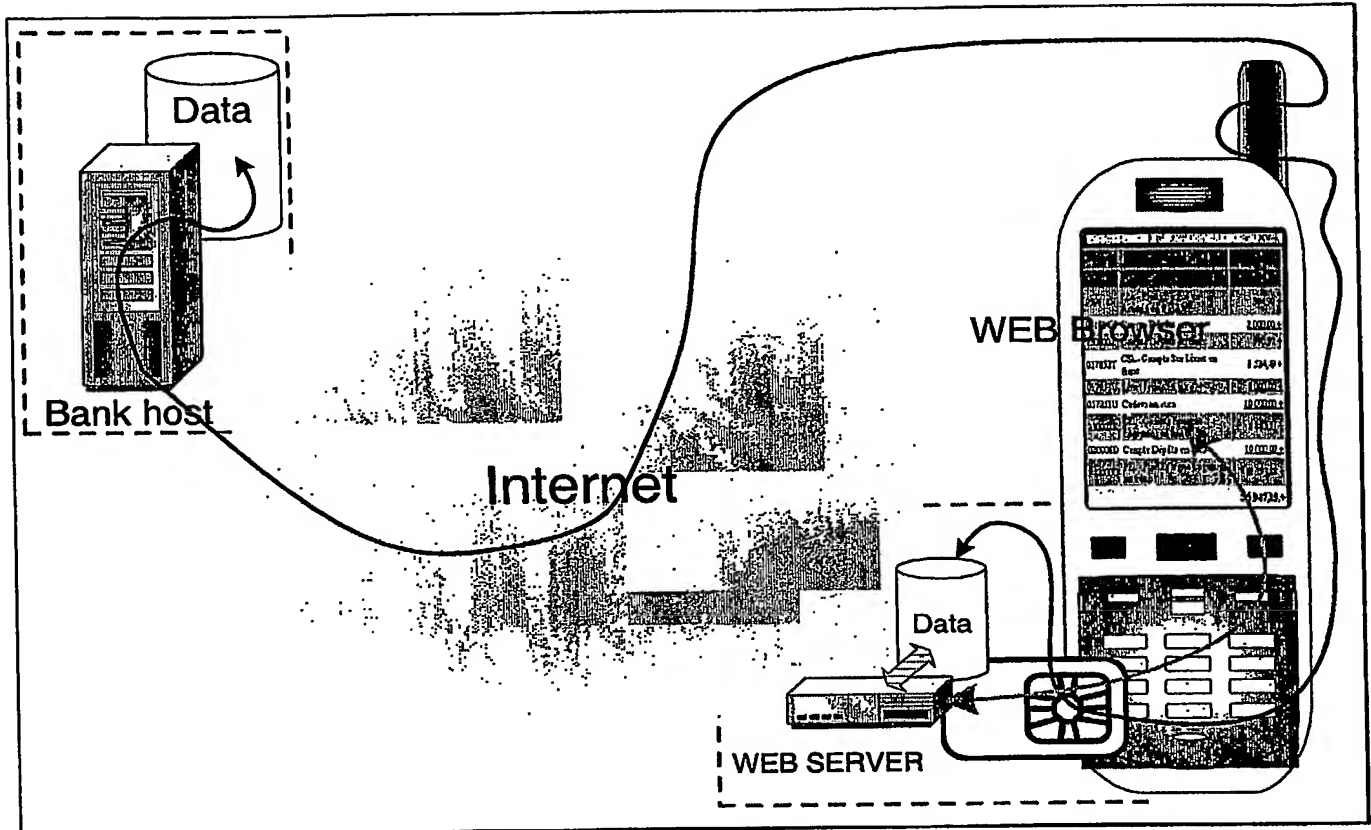


Fig.2

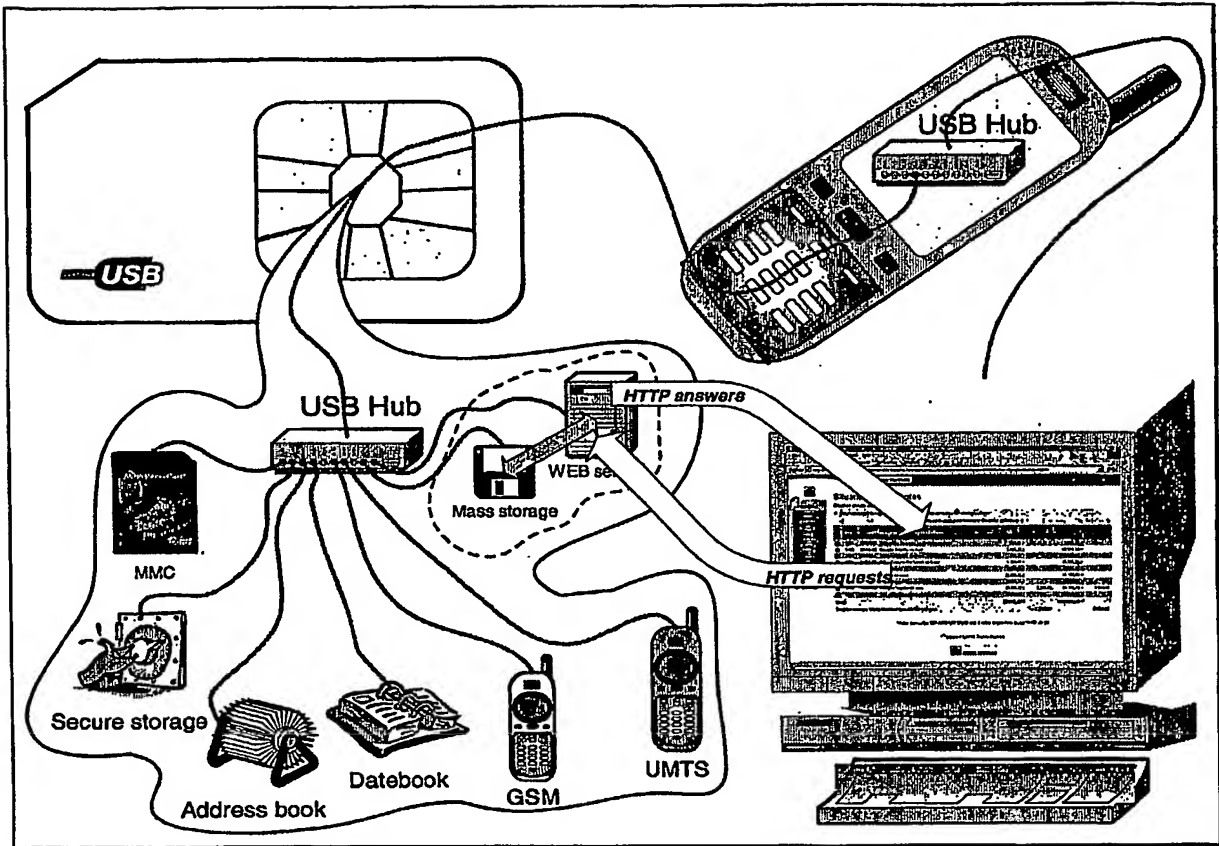


Fig. 3

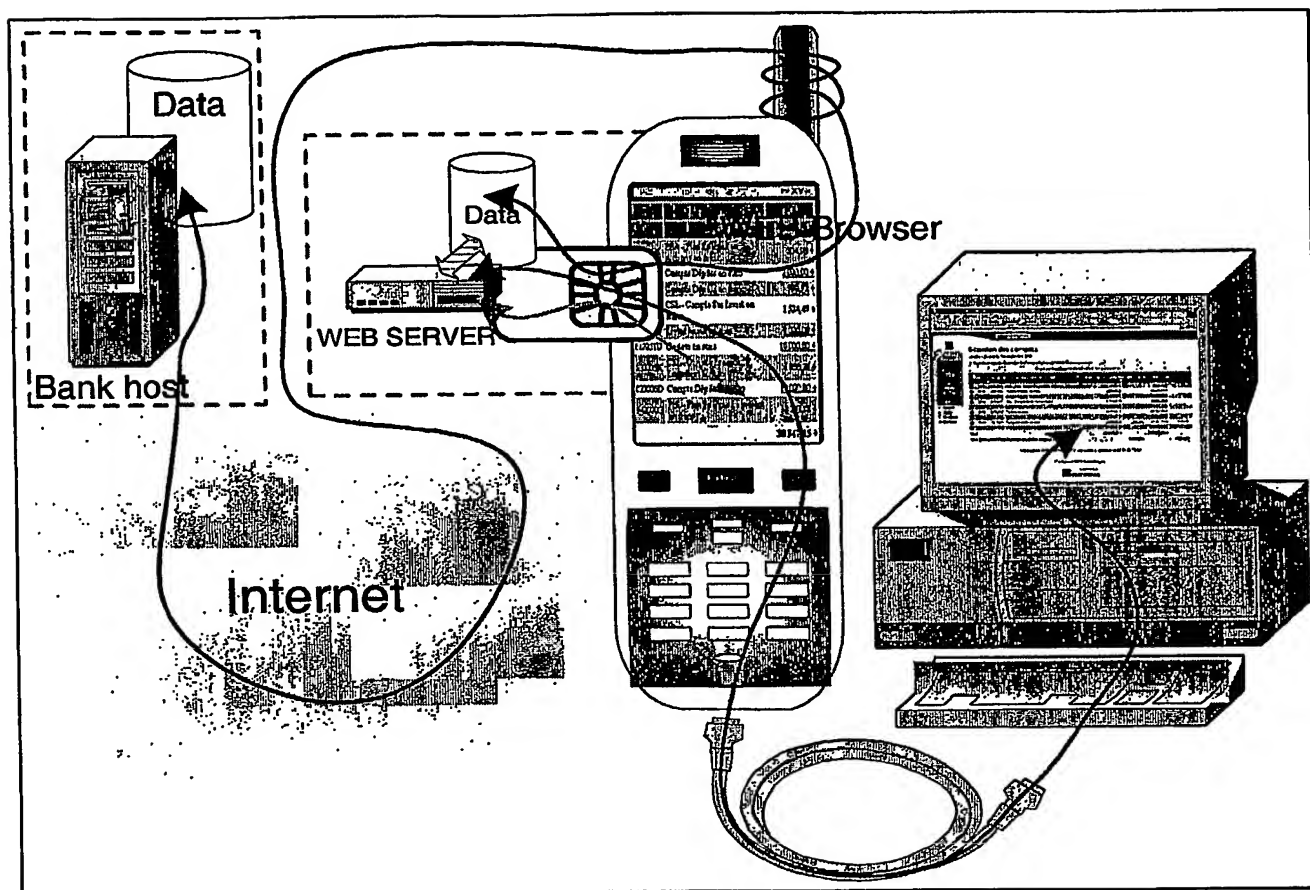


Fig. 4

**Declaration of inventorship (Rules 4.17(iv) and 51 bis.1(a)(iv))
for the purposes of the designation of the United States of America:**

I hereby declare that I believe I am the original, first and sole (if only one inventor is listed below) or joint (if more than one inventor is listed below) inventor of the subject matter which is claimed and for which a patent is sought.

This declaration is directed to the international application of which it forms a part.

I hereby declare that my residence, mailing address, and citizenship are as stated next to my name.

I hereby state that I have reviewed and understand the contents of the above-identified international application, including the claims of said application. I have identified in the request of said application, in compliance with PCT Rule 4.10, any claim to foreign priority, and I have identified below, under the heading "Prior Applications," by application number, country or member of the World Trade Organization, day, month and year of filing, any application for a patent or inventor's certificate filed in a country other than the United States of America, including any PCT international application designating at least one country other than the United States of America, having a filing date before that of the application on which foreign priority is claimed.

Prior Applications:

I hereby acknowledge the duty to disclose information that is known by me to be material to patentability as defined by 37C.F.R. § 1.56, including for continuation-in-part applications, material information which became available between the filing date of the prior application and the PCT international filing date of the continuation-in-part application..

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Name: Olivier JOFFRAY

Residence: FEUCHEROLLES - FRANCE
(city and country)

Mailing Address: AXALTO INTELLECTUAL PROPERTY DEPARTMENT
36-38 Rue de la Princesse BP 45
78431 LOUVECIENNES CEDEX - FRANCE

Citizenship: FRENCH

Inventor's signature: **Date: 11 July 2004**

Name: Serge BARBE

Residence: Chateaufort - France
(city and country)

Mailing Address: AXALTO INTELLECTUAL PROPERTY DEPARTMENT
36-38 Rue de la Princesse BP 45
78431 LOUVECIENNES CEDEX - FRANCE

Citizenship: FRENCH

Inventor's signature: **Date: 11 July 2004**

Name:

Residence:
(city and country)

Mailing Address:

Citizenship:

Inventor's signature: **Date:**

☐ This declaration is continued on the following sheet, "Continuation of Box No. VIII (iv)".

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☒ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.